

10/11/00

A

UTILITY PATENT APPLICATION TRANSMITTAL

(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
BSI-469USTotal Pages in this Submission
49**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for invention entitled:

COMBINATION SELF-EXPANDABLE, BALLOON-EXPANDABLE ENDOLUMINAL DEVICE

and invented by:

Steven E. WalakIf a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 30 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
BSI-469US

Total Pages in this Submission
49

Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)

- a. ☐ Formal Number of Sheets _____
- b. ☒ Informal Number of Sheets 7

4. ☒ Oath or Declaration

- a. ☒ Newly executed (original or copy) ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (usable if Box 4b is checked)

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

6. ☐ Computer Program in Microfiche (Appendix)

7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)

- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☒ Assignment Papers (cover sheet & document(s))

9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)

10. ☐ English Translation Document (if applicable)

11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations

12. ☐ Preliminary Amendment

13. ☒ Acknowledgment postcard

14. ☒ Certificate of Mailing

☐ First Class ☒ Express Mail (Specify Label No.): EL684159501US

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
BSI-469US

Total Pages in this Submission
49

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)


16. ☐ Additional Enclosures (please identify below):

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	47	- 20 =	27	x \$18.00	\$486.00
Indep. Claims	3	- 3 =	0	x \$80.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$710.00
OTHER FEE (specify purpose) <u>Assignment Recordation</u>					\$40.00
TOTAL FILING FEE					\$1,236.00

- ☒ A check in the amount of \$1,196.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 18-0350 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).


Signature

Christopher R. Lewis, Reg. No. 36,201
Attorney for Applicant

Dated: October 31, 2000

RATNER & PRESTIA
Suite 301, One Westlakes (Berwyn)
P.O. Box 980
Valley Forge, PA 19482-0980
(610) 407-0700

cc:

COMBINATION SELF-EXPANDABLE,
BALLOON-EXPANDABLE ENDOLUMINAL DEVICE

TECHNICAL FIELD

This invention relates generally to endoluminal devices such as vena cava filters, stents, grafts, and/or prostheses and, more specifically, to endoluminal devices that have combined self-expanding and balloon-expandable properties.

BACKGROUND OF THE INVENTION

A stent is an elongated device used to support an intraluminal wall. In the case of a stenosis, a stent provides an unobstructed conduit for blood in the area of the stenosis. Such a stent may also have a prosthetic graft layer of fabric or covering lining the inside or outside thereof, such a covered stent being commonly referred to in the art as an intraluminal prosthesis, an endoluminal or endovascular graft (EVG), or a stent-graft.

A prosthesis may be used, for example, to treat a vascular aneurysm by removing the pressure on a weakened part of an artery so as to reduce the risk of rupture. Typically, a prosthesis is implanted in a blood vessel at the site of a stenosis or aneurysm endoluminally, i.e. by so-called "minimally invasive techniques" in which the prosthesis, restrained in a radially compressed configuration by a sheath or catheter, is delivered by a deployment system or "introducer" to the site where it is required. The introducer may enter the body through the patient's skin, or by a "cut down" technique in which the entry blood vessel is exposed by minor surgical means. When the introducer has been threaded into the body lumen to the prosthesis deployment location, the introducer is manipulated to cause the prosthesis to be ejected from the surrounding sheath or catheter in which it is restrained (or alternatively the surrounding sheath or catheter is retracted from the prosthesis), whereupon the prosthesis expands to a predetermined diameter at the deployment location, and the

introducer is withdrawn. Stent expansion may be effected by spring elasticity, balloon expansion, or by the self-expansion of a thermally or stress-induced return of a memory material to a pre-conditioned expanded configuration.

5 A vena cava filter is an implantable filter, typically implanted in a patient's inferior vena cava using minimally invasive techniques, for reducing the risk of arterial plaques dislodged during surgery or clots formed in the bloodstream from becoming lodged in and partially or completely blocking vessels supplying blood and oxygen to critical organs, such as the heart, lungs and brain. Such filters enable dangerous blood clots to be removed from circulation and held in a safe location until they can be dissolved by medication or
10 extracted, again using minimally invasive techniques. Conventional implantable blood filters employing a variety of geometries are known, but many are generally basket or cone shaped to provide adequate clot-trapping area while permitting sufficient blood flow. Also known are filters formed of various loops of wire, including some designed to partially deform the vessel wall in which they are implanted.

15 Typically, endoluminal devices such as vena cava filters and stents expand by one mechanism or another, not by some combination. That is, balloon expandable devices are not also self-expanding, and self-expanding devices are not typically balloon expandable. While it is known to "model" self-expanding stents to conform the anatomy in which the stent has been deployed to a shape suitable for accepting the stent, such modeling does not
20 vary the diameter of the stent, but rather varies the anatomy. For example, a self-expanding stent deployed in an artery having a plaque deposit on the walls may be modeled to crush the plaque deposit down.

Self-expanding devices typically are known for excellent crush resistance, potential for longitudinal flexibility, for exerting a constant outward force to maintain an
25 open vessel, and for having the capacity to elastically expand and contract with the blood vessel. On the other hand, self-expanding devices typically must be sized accurately to provide acceptable outward force and cannot generally be manipulated to a larger diameter after deployment. Self-expanding devices are typically made of a superelastic material, such as a superelastic grade of nitinol, which has a limited x-ray visibility.

30 Balloon-expandable devices are typically capable of expansion into a range of sizes, and typically are relatively stiff and inflexible. Balloon-expandable devices do not

typically recover if crushed in the body, however, and are rigid bodies that do not expand and contract with motion of the vessel. Balloon-expandable devices are also typically longitudinally rigid, limiting delivery through tortuous anatomy. Balloon-expandable devices are made of a plastically deformable metal such as stainless steel, platinum, or a plastically deformable grade of nitinol.

In light of the advantages and disadvantages of self-expanding and balloon-expandable technologies as currently known, there is a need in the art for technology bridging the advantages of both.

SUMMARY OF THE INVENTION

It is to be understood that both the foregoing general description and the following detailed description are exemplary, but are not restrictive, of the invention. The invention comprises an endoluminal device, such as a stent or a vena cava filter, comprising at least one superelastic section and at least one plastically deformable section. The device typically has a first constrained diameter, a second fully-self-expanded diameter, and a third fully-forcibly-expanded diameter, wherein the third diameter is greater than the second diameter and the second diameter is greater than the first diameter.

The device may comprise a plurality of filaments including one or more superelastic filaments and one or more plastically deformable filaments, particularly where one or more of the superelastic filaments extends longitudinally substantially parallel to one or more of the plastically deformable filaments along the length of the stent. In the alternative, each superelastic section and/or each plastically deformable section may comprise a sheet or a longitudinally severed tube cut by a laser or other precision cutting mechanism.

Each superelastic filament may be connected along one or more longitudinal portions thereof to another superelastic filament, another columnar unit of the same superelastic filament, one or more plastically deformable filaments, or a combination thereof. Similarly, each plastically deformable filament may be connected along one or more longitudinal portions thereof to another plastically deformable filament, another columnar unit of the same plastically deformable filament, one or more superelastic filaments, or a combination thereof. The longitudinal portions may be connected at a joint by brazing, welding, adhesive bonding, or suturing.

The superelastic filament or filaments preferably comprise a superelastic grade of nitinol, such as thermal shape memory nitinol. The plastically deformable filament or filaments preferably comprise gold, platinum, tantalum, titanium, stainless steel, tungsten, a cobalt alloy, a nickel alloy, a titanium alloy, or a combination thereof, such as a plastically deformable grade of nitinol or a composite nitinol wire having a core of a plastically deformable material (hereinafter referred to as a “deformable core nitinol composite”).

Each plastically deformable section may comprise a constrained portion of the superelastic section comprising a plastically deformable material, such as gold. For example, the constrained portion may comprise a combination of superelastic material and plastically deformable material, such as plastically deformable material plated onto superelastic material, a plastically deformable hypotube overlaid onto superelastic material, plastically deformable material ion implanted within superelastic material, or a composite of deformable material and superelastic material. In particular, the device may be cut from a composite comprising a sandwich having outer layers of nitinol and inner longitudinal or transverse stripes of plastically deformable material. In an alternative embodiment, the device may comprise one or more hoops in a zig-zag configuration of oppositely-pointing apex sections, where the plastically deformable sections comprise one or more apex sections comprising plastically deformable material. The plastically deformable apex sections on each of said hoops may be longitudinally aligned.

The device may also comprise a first tubular section comprising a superelastic section and a second tubular section comprising a plastically deformable section. Where the first and second tubular sections both comprise a combination of superelastic material and plastically deformable material, the plastically deformable section has a ratio of plastically deformable material to superelastic material that is greater than the ratio of plastically deformable material to superelastic material in the superelastic section. The device may comprise a plastically deformable section mounted between two superelastic sections each having different fully-self-expanded diameters, so that the device can be mounted in a tapered lumen and forcibly expanded to conform to the taper in the lumen in accordance with a method of this invention.

The invention also comprises a method of deploying an endoluminal device of this invention in a body lumen. The method comprises introducing the device into the body lumen with the device radially constrained in a first configuration having the first diameter;

allowing the device to self-expand into a second configuration having a diameter less than or equal to the second diameter; and optionally forcibly expanding at least a portion of the device into a third configuration having a diameter greater than the second diameter and less than or equal to the fully-expanded diameter.

5 Where the device comprises a plastically-deformable tubular section and a superelastic tubular section, the method may comprise deploying the device in a lumen having a tapered portion. In such case, the method further comprises introducing the device with the device radially constrained in a first configuration in which each tubular section has a first diameter. Next, the device is allowed to expand such that the plastically deformable
10 section aligns with the tapered portion of the lumen. Thus, the device self-expands into a second configuration in which the superelastic section has a second diameter greater than the first diameter and less than or equal to the fully-self-expanded diameters. The device is finally forcibly expanded into a third configuration in which the plastically deformable section has a variable diameter that conforms to the tapered section of the lumen.

BRIEF DESCRIPTION OF DRAWINGS

15 The invention is best understood from the following detailed description when read in connection with the accompanying drawing. It is emphasized that, according to common practice, the various features of the drawing are not to scale. On the contrary, the dimensions of the various features are arbitrarily expanded or reduced for clarity. Included
20 in the drawing are the following figures:

 Fig. 1 is a side view illustration of an exemplary filamentary stent of the present invention cut longitudinally and laid flat, consisting of two filaments.

 Fig. 2 is a side view illustration of an exemplary brazed joint.

25 Fig. 3A is a side view illustration of an exemplary zig-zag stent hoop of the present invention cut longitudinally and laid flat, in a constrained configuration.

 Fig. 3B is a side view illustration of the exemplary zig-zag stent hoop of Fig. 3A in a fully-self-expanded configuration.

 Fig. 3C is a side view illustration of the exemplary zig-zag stent hoop of Fig. 3A in a fully-forcibly-expanded configuration.

Fig. 4A is a side view illustration of an exemplary filamentary stent of the present invention cut longitudinally and laid flat, comprising a plurality of superelastic and plastically deformable filaments, in a constrained configuration.

5 Fig. 4B is a side view illustration of the exemplary filamentary stent of Fig. 4A in a fully-self-expanded configuration.

Fig. 4C is a side view illustration of the exemplary filamentary stent of Fig. 4A in a fully-forcibly-expanded configuration.

Fig. 4D is a top view illustration of the exemplary filamentary stent of Fig. 4A in the constrained configuration of Fig. 4A.

10 Fig. 4E is a top view illustration of the exemplary filamentary stent of Fig. 4A in the fully-self-expanded configuration of Fig. 4B.

Fig. 4F is a top view illustration of the exemplary filamentary stent of Fig. 4A in the fully-forcibly-expanded configuration of Fig. 4C.

15 Fig. 5A is a side view illustration of an exemplary laser-cut stent of the present invention cut longitudinally and laid flat, in a constrained configuration.

Fig. 5B is a side view illustration of the exemplary laser-cut stent of Fig. 5A in a fully-self-expanded configuration.

Fig. 5C is a side view illustration of the exemplary laser-cut stent of Fig. 5A in a fully-forcibly-expanded configuration.

20 Fig. 6 is a side view illustration of an exemplary prosthesis cut longitudinally and laid flat, comprising a plurality of zig-zag stent hoops.

Fig. 7A is a perspective view of an exemplary composite sheet having continuous longitudinal stripes of plastically deformable material, used for making an exemplary stent embodiment of the present invention.

25 Fig. 7B is a perspective view of a tube formed from the composite sheet of Fig. 7A, after a rolling step.

Fig. 7C is a perspective view of a composite tube comprising an inner and outer hypotube.

Fig. 7D is a perspective view of an exemplary composite sheet having transverse stripes of plastically deformable material, used for making an exemplary stent
5 embodiment of the present invention.

Fig. 7E is a perspective view of a tube rolled from the composite sheet of Fig. 7D.

Fig. 7F is a plan view illustration of a pattern to be cut on the composite sheet of Fig. 7A.

Fig. 8A is a perspective view of an exemplary assembled composite tube and its individual components for making an exemplary stent embodiment of the present invention, prior to a tube drawing step.

Fig. 8B is a perspective view of a tube of Fig. 8A after the tube drawing step.

Fig. 9 is a longitudinal section illustration of an exemplary prosthesis deployed
15 in a lumen.

Figs. 10 is a side view illustration of an exemplary prosthesis comprising plastically deformable elements only at opposite ends of the stent.

DETAILED DESCRIPTION OF INVENTION

The invention will next be illustrated with reference to the figures wherein
20 similar numbers indicate the same elements in all figures. Such figures are intended to be illustrative rather than limiting and are included herewith to facilitate the explanation of the apparatus of the present invention.

Although the term "vena cava filter" technically refers to implantable filters placed in the vena cava -- the jugular or femoral veins, which are the typical locations for
25 such filters -- the term as used herein refers to any type of implantable filter, regardless of the specific body lumen into which it is implanted. In particular, the anchoring assemblies or portions of vena cava filters shown in U.S. Patent Nos. 5,709,704 and 5,836,939 may be

particularly well-suited for construction in accordance with this invention. Vena cava filters are deployed much in the same way as stents, and thus throughout this application the term “endoluminal device” is used to refer to both vena cava filters and stents. In many instances, however, examples refer specifically to stents, but should not be interpreted to be limited to stents alone. Thus, discussion of aspects of this invention with respect to stents should also be considered applicable to implantable filters and vice versa, where applicable.

Fig. 1 shows an exemplary stent embodiment according to the present invention wherein the tubular stent has been cut along a line parallel to the tubular stent axis and flattened. The architecture of stent 12 shown in Fig. 1 is substantially similar to the architectures described in U.S. Patent Nos. 5,354,308 and 5,395,390 to Simon *et al.*, which are incorporated herein by reference, and described further below. The structures described in the ‘308 and ‘390 Simon patents are merely examples of particular stent architectures, and are not intended to be limiting. Other U.S. patents and patent families claiming priority therefrom, incorporated herein by reference, that may be well-suited for use in this invention include:

5,019,090	Pinchuk
5,135,536	Hillstead
5,292,331	Boneau
5,282,824	Gianturco
5,354,308	Simon <i>et al.</i>
5,507,767	Maeda <i>et al.</i>
5,800,515	Nadal <i>et al.</i>

The above list of patents is only exemplary, not limiting, however, as any number of different stent architectures may be used to create stents in accordance with this invention.

Stent 12 comprises a plurality of filaments 15 and 17. Superelastic filaments 15 typically comprise a superelastic grade of nitinol, whereas plastically deformable filaments

17 typically comprise gold, platinum, tantalum, titanium, stainless steel, tungsten, a cobalt alloy, a nickel or titanium alloy, such as a plastically deformable grade of nitinol or deformable core nitinol composite, or a combination of any of the above. The filaments may in the alternative comprise bioabsorbable or biostable polymers, such as are known in the art.

5 As used herein, a “superelastic” material is one that may be deformed into a certain configuration without the material permanently taking on the deformed shape. For example, a thermal shape memory material may be deformed into a number of configurations, but will return to its memory shape upon temperature activation. A “plastically deformable” material, on the other hand, is a material that once deformed into a
10 certain shape, keeps that shape indefinitely, until deformed again by some other force.

As described in the background section, stents are typically inserted into a body lumen from a remote location through an insertion point in the body through which an “introducer”, containing the stent in a radially compressed configuration, is threaded and navigated through the body lumen to the deployment location, where the stent is deployed in a radially expanded configuration. As referred to herein, “distal” refers to the direction further away from the insertion point and “proximal” refers to the direction closer to the insertion point.

As shown in Fig. 1, stent 12 comprises a filamentary stent architecture having a plurality of polygonal, hexagonal cells 30 having as sides thereof straight axially-extending portions 32 joined together along a set of parallel lengths 34, the parallel lengths deviating from one another proximally and distally of each parallel length into diagonal lengths 36, such that each set of parallel lengths and attached diagonal lengths form a Y-shaped intersection 38. The polygonal cell stent architecture in stent 12 terminates at a set of parallel lengths 34a, which may be joined together by welding, brazing, or any means known
25 in the art, and additionally may comprise a single filament merely bent 180 degrees back upon itself, as shown in Fig. 1. In the alternative, the ends may be wound into an end winding having a different stent architecture, such as is described in U.S. Patent Application Serial No. 09/442,165, filed November 16, 1999, assigned to the common assignee of the present invention, and incorporated herein by reference.

30 As shown in Fig. 1, stent 12 comprises two sections 14 and 16. Section 14 is a superelastic section and section 16 is a plastically deformable section. Each section 14 and

16 extends longitudinally along length L of the stent. As shown in Fig. 1, stent 12 consists of two filaments: superelastic filament 15 and plastically deformable filament 17. For ease of illustration in Fig. 1, stent 12 is shown after having been slit longitudinally and flattened, cutting filament 15 into two sections. When stent 12 is in its normal tubular form, however, filament ends 15a and 15b are connected to one another as part of continuous filament 15. For ease of identification, plastically deformable filament 17 is shown in Fig. 1 shaded in gray. Throughout the figures, gray shading is used to distinguish the plastically deformable elements from superelastic elements.

Stent 12 has opposite ends 18 and 20. Each filament 15 and 17 longitudinally traverses length L of stent 12 from the end 18 to the end 20 in a plurality of columnar units 22. As used herein, the term "columnar unit" refers to a single pass of the filament from one of ends 18 or 20 to the opposite end. Thus, as shown in Fig. 1, filament 15 comprises ten columnar units and filament 17 comprises two columnar units. In an alternative embodiment, each columnar unit, each pair of columnar units, or any number of columnar units may comprise a separate filament. Where each columnar unit is a separate filament, as shown in Fig. 4C, each superelastic filament 15 and each plastically deformable filament 17 extends only once between end 18 and end 20. Thus, stent 40 as shown in Fig. 4C comprises four superelastic filaments and four plastically deformable filaments. In such a case, ends 15d and 15e, for example, may be welded, brazed, twisted, glued, sutured, or otherwise connected together by means other than by a 180-degree turn 15c of a continuous wire, such as shown in Fig. 1.

As shown in Fig. 1, superelastic filament 17 extends longitudinally substantially axially parallel to plastically deformable filament 15 along length L of stent 12. As used herein, "substantially parallel" is used to denote that despite the serpentine bending of each filament about axis I, the axes of each columnar unit are essentially parallel to one another when the stent is in an unconstrained configuration. "Essentially parallel" is used to acknowledge that some minimal deviation from parallel may be possible.

Superelastic filament 15 is connected along one or more longitudinal portions thereof (each pair of parallel lengths 34) to either another columnar unit of the same superelastic filament, such as at 34a or 34b, or to plastically deformable filament 17, such as at 34c. Similarly, plastically deformable filament 17 is connected along one or more longitudinal portions thereof to another columnar unit of the same plastically deformable

filament, such as at 34d, or to superelastic filament 15, such as at 34c, or some combination thereof. Where the stent comprises multiple superelastic filaments 15 and multiple plastically deformable filaments 17, such as illustrated in Fig. 4C, each plastically deformable filament may be connected along one or more longitudinal portions thereof to another plastically deformable filament, such as at 34e, or to a superelastic filament, such as at 34f, and each superelastic filament may be connected along one or more longitudinal portions thereof to another superelastic filament, such as at 34g, or to a plastically deformable filament, such as at 34f.

The longitudinal portions of the filaments at each set of parallel lengths 34 may be connected to make a joint by any means known in the art, such as brazing, welding, adhesively bonding, or suturing. Welding, suturing, adhesive bonding, and brazing processes are well-known in the art. Where the joint is a welded joint, it is preferable that both the superelastic material and the plastically deformable material are grades of nitinol. A superelastic grade of nitinol is any grade that is in its Austenitic phase at the use temperature (essentially the temperature of the human body). A plastically deformable grade of nitinol is any grade that is in its Martensitic phase at the use temperature, such as Alloy M, manufactured by Shape Memory Application Inc., of San Jose, CA, having a typical Active Austenite Finish A_f in the range of 45-95°C, or Alloys B (A_f 45-80°C) or BH (A_f 80-120°C), manufactured by Memry Corporation, of Brookfield, CT. Deformable core nitinol composites are also plastically deformable nitinol materials. Where the joint is a brazed joint, the preferred superelastic material is nitinol and the preferred plastically deformable material is stainless steel, a titanium alloy, or platinum.

A brazed joint may comprise any wire wrapped around the joint to provide mechanical support. An exemplary brazing method is described, below. As shown in Fig. 2, joint 21 comprises filaments 22 and 24 wrapped by coil 26. One of filaments 22 and 24 may be superelastic, and the other plastically deformable, or both filaments may be the same type of material. To form such a brazed joint, wires 22 and 24 are brought together so that they abut, and a brazing material, such as any standard brazing material known in the art, is melted to wet at least the portions of both wires that contact one another, and cooled to solidify. Coil 26 is then wrapped around the brazed, abutted filaments. Coil 26 may comprise a deformable metal or a thermal shape memory material, such as nitinol. Where a shape memory material is used, it may be first wound into a tight helical coil around a small diameter form and annealed to set its Austenite shape. It is then cooled to its Martensite

configuration and unraveled to be re-coiled about the brazed, abutted filaments. A heating step then shrinks joining coil 26 back to its tight Austenite shape. A low-temperature brazing material may then be melted and solidified over the coil to fix the coil in its Austenite shape.

In the alternative, instead of a filamentary coil, a split hypotube may be annealed in a closed shape, cooled to its Martensite condition and opened to allow it to be slipped over abutted filaments 22 and 24, and heat shrunk back to its closed shape. The low temperature brazing material may then be used to seal the hypotube in the closed position.

In an alternative embodiment, shown in Figs. 3A-C, stent 30 may comprise a zig-zag stent architecture. As shown in Fig. 3C, a zig-zag stent architecture comprises a plurality of struts 300 joined at apex sections 302, with a plurality of alternating oppositely-pointed apex sections arranged into cylindrical hoops, shown in Figs. 3A-C after being longitudinally cut and flattened. Apex sections 302 pointing in a first direction can be referred to peaks 306 and apex sections pointing in the opposite direction can be referred to as valleys 308, with any circumferentially adjacent, oppositely pointing apex sections together with three adjacent struts 300 forming a zig-zag 310. The zig-zag architecture shown in Fig. 3 is merely one exemplary zig-zag embodiment, but is not intended to limit the invention thereto.

As shown in Fig. 3C, each plastically deformable section 16 comprises a constrained portion of superelastic section 14. Plastically deformable section 16 in Fig. 3C comprises a combination of plastically deformable material 320 and superelastic material (filament 15). Fig. 3C shows a single hoop in a zig-zag configuration, split and laid flat, of oppositely-pointing apex sections (peaks 306 and valleys 308), where each plastically deformable section 16 comprises a peak 306 comprising plastically deformable material. As shown in Fig. 3C, the combination comprises plastically deformable material overlying the superelastic material, such as made by plating deformable material, such as gold, onto the superelastic material, or by overlying a plastically deformable hypotube onto the superelastic material. The combination may instead comprise plastically deformable material ion implanted into superelastic material, or a composite of deformable material and superelastic material. Ion implantation processes are well-known in the art. A composite combination is described herein below.

As shown in Fig. 6, a prosthesis 60 (shown split and laid flat) may comprise a plurality of stent hoops 61 attached to a graft 62, wherein peaks 306 on each hoop are longitudinally aligned with the peaks of the other hoops. The plastically deformable apex sections 16 on each of the hoops may then be longitudinally aligned with the plastically deformable apex sections on the other hoops.

Although shown as a filamentary stent in Figs. 1-4F, stent 12 may also comprise, at least in part, a hypotube or sheet cut by precision cutting means such as a laser or chemical etching, as shown in Figs. 5A-5C. While laser cutting is the most common such method for performing such a cutting step, as is known in the art, the structure is not limited to any particular cutting mechanism. As shown in Fig. 5C, superelastic section 14 of stent 50 comprises a laser-cut sheet or a longitudinally severed laser cut tube. The opposite edges 51 and 52 of superelastic section 14 are joined together by plastically deformable section 16. Plastically deformable section 16 may be a portion of a laser-cut sheet or longitudinally severed laser cut tube itself, in which each joint 21 between sections 14 and 16 may be attached by brazing, welding, adhesive bonding, or any method known in the art. Section 16 may instead be filamentary, such as for example, a filament having a zig-zag architecture stent (not shown) wound helically between edge-most cells 30a and edge-most cells 30b on adjacent opposite edges 51 and 52 of superelastic section 14. For example, the filament may be wound in order from cell 30a₁ to 30b₂ to 30a₂ to 30b₂ to 30a₃ to 30b₃ to 30a₄ and optionally back again to cell 30a₁ through all of the same cells in reverse order.

As shown in Fig. 5C, plastically deformable section 16 comprises at least one columnar unit 22 having a longitudinal zig-zag configuration disposed between opposite longitudinal edges 51 and 52 of single superelastic section 14. Where there are multiple superelastic sections 14, each plastically deformable section may be disposed between two superelastic sections, and each superelastic section may be disposed between two plastically deformable sections.

In an alternative embodiment, stent 50 may comprise a single composite hypotube having plastically-deformable longitudinal stripes that is cut to form a seamless stent. Figs. 7A-8B illustrate various methods for forming a composite hypotube. As shown in Fig. 7A, a composite sandwich sheet 750 may comprise a lower layer 752 and upper layer 754 comprising superelastic material, such as nitinol, and a plurality of continuous longitudinal stripes 756a-d comprising plastically deformable material. Plastically

deformable stripes 756a-d may comprise high density metal such as Pt, Ta, Au, Pd, W and the like, which provide improved visibility under x-ray imaging. Stiffer metals, such as W, may be preferred to add more stiffness to the composite. Each stripe 756a-d may comprise the same material, different materials, or alternating stripes of two or more different materials may be used, such that, for example, stripes 756a and 756c may comprise a first material, while stripes 756b and 756d comprise another. The thickness of individual stripes 756a-d, spaces 757a-c between the stripes, and overall number of stripes, in conjunction with the materials of the stripes, all may be varied as desired to obtain desired composite characteristics. Stripes may be longitudinal as shown in Figs. 7A-7C, or transverse as shown in Figs. 7D-7E, and may be continuous or broken. Thus, for example, stripes 756a-d may extend from end to end of lower sheet 752, or may only be present at the ends and not in the middle, or in selected longitudinal sections to provide areas of balloon-expandability only where desired. Regardless of whether the stripes are continuous or broken, or longitudinal or transverse, all of the embodiments described herein can be described as comprising a layer of plastically deformable material in a non-continuous distribution sandwiched between layers of superelastic materials.

Composite sandwich sheet 750 may be fabricated by depositing stripes 756a-d on lower layer 752 or upper layer 754, the two layers placed together with the stripes in between, and then the sandwich rolled to a final thickness. The rolled sandwich may then be formed into a tube 751 with the ends joined together at weld 758, as shown in Fig. 7B. Layers 752 and 754 may be fused together with stripes 756a-d in between using a hot isostatic press prior to rolling. Stripes 756a-d may be deposited by electroplating, ion beam deposition, plasma spray, laser-assisted deposition, or any method known in the art. In particular, electro-polishing the surface of nitinol onto which the stripes are to be deposited (to remove oxides from the metal surface) has been found to be desirable prior to the deposition step. For gold electroplating, the use of an acid-based gold strike process is preferred, such as is described in U.S. Patent Serial No. 09/227,407 by Steven Taskovics et al., filed on January 8, 1999, assigned to the common assignee of this invention and incorporated herein by reference.

In another embodiment, shown in Fig. 7C, longitudinal stripes 756a-d may be electroplated onto an inner hypotube 760 and the striped inner hypotube placed inside an outer hypotube 762. The tube may then be drawn, as is known in the art, to create a continuous hypotube similar to that shown in Fig. 7B (absent weld 758). The non-continuous

intermediate layer formed by stripes 756a-d allows for areas of nitinol to nitinol contact between the stripes to provide support during the drawing process, which is an advantage over the use of a continuous intermediate layer.

Although shown in Figs. 7A-7C with stripes 756a-d that run longitudinally, the stripes may also run transversely, as shown in Figs. 7D and 7E. Transverse stripes 756e and 756f may be formed between lower and upper sheets 752 and 754 respectively using the sheet fabrication process as shown in Fig. 7D and described above with respect to Figs. 7A-7B, or may be formed using the hypotube process as described above with respect to Fig. 7C. The final tube structure 764 may thus comprise a seamless tube, as shown in Fig. 7E, if manufactured using hypotubes and drawing the assembled hypotubes, or may have a longitudinal weld similar to weld 758 shown in Fig. 7B, if created as a rolled sheet and then joined at the ends. In either case, tube 764 comprises one or more longitudinal sections 766a and 766b comprising an inner ring of plastically deformable material. As with the longitudinal stripes, the transverse stripes may be continuous or broken, such as stripe 756f, which is broken into four pieces, 756f_{i-iv} which results in a broken ring 766b of plastically deformable material. Thus, as shown in Fig. 7E, the resulting ring 766b essentially comprises a set of longitudinal stripes or plastically deformable material present only on end section 768 of tube 764.

Yet another process for forming a composite hypotube is illustrated with respect to Figs. 8A and 8B, using technology similar to technology used in the formation of superconducting wires. A relatively large diameter superelastic hypotube 802 and a relatively smaller diameter superelastic hypotube 804 are positioned concentrically and a number of even smaller diameter superelastic tubes 806 are packed between tubes 802 and 804, as shown in Fig. 8A. Into the core 807 of each tube 806 is placed a plastically deformable wire 808. Heat and pressure, such as in a hot isostatic press, may be used to consolidate the assembly 810 into a bonded structure. Then assembly 810 is drawn to a desired diameter, leaving the final tube structure 812 shown in Fig. 8B having longitudinal cylindrical portions of plastically deformable material embedded therein. A sacrificial center core (not shown) may be used within the center 805 of tube 804 to assist in drawing tube 812. The sacrificial center core may then be removed at a later time by etching or a "pull to shrink" process as is known in the art. Wires 808 may also be used in place of stripes 756 or 756a-d when forming the composite using the processes described with respect to Figs. 7A-7E. Although shown in Fig. 8A as having a hexagonal cross-section, tubes 806 may have

any geometric cross-section known in the art. In yet another embodiment, the tube structure 812 shown in Fig. 8B may be created by starting with a thick-walled hypotube (not shown), drilling longitudinal holes in the hypotube and filling them with wires 808, and then drawing the assembled composite to create structure 812.

5 It should be noted that although described herein with respect to the use of superelastic and plastically deformable composite materials, the above composite processes may also be used for forming composite materials using only plastically deformable materials. For example, instead of lower and upper sheets 752 and 754 or inner and outer hypotubes 760 and 762, respectively, comprising a superelastic material such as nitinol, these
10 components may comprise stainless steel, a cobalt alloy, or the like. The provision of stripes of other materials may thus be used to provide improved radiopacity, increased or decreased stiffness, or some other desired material property. Furthermore, for composites of plastically deformable and superelastic materials, the choice of plastically deformable material and the amount thereof in the composite can be chosen to create a hybrid device that is both
15 plastically deformable and superelastic as described herein, or can be chosen merely to enhance radiopacity without significantly affecting the superelastic properties of the superelastic material.

Referring now to Fig. 7F, to form the stent or vena cava filter, the resulting composite sandwich 750 (after rolling) may then be cut by etching or cutting as is known in
20 the art, in a pattern 784 corresponding to the desired architecture of the device, such as the zig-zag architecture shown in Fig. 7F. The pattern may preferably be aligned so that the features of the architecture desired to be plastically deformable, such as every other upwardly-pointing apex 786, as shown in Fig. 7F, are aligned with plastically deformable stripes 756a-d within composite sheet 750. After cutting, the resulting flat pattern 784 may
25 then be rolled into a tubular shape and ends 788a, 788b, and 788c welded together as 788a-788a, 788b-788b, and 788c-788c to form the desired device. In the alternative, the tubular composite shown in Figs. 7B or 7E may be cut in their tubular form to create the device. Although shown in Fig. 7F with the stripes oriented longitudinally with respect to the cylindrical orientation of the device, the stripes may also be transverse as shown in Figs. 7D
30 and 7E.

Thus, in the embodiments using a composite sheet or tube, the plastically deformable section comprises a combination of plastically deformable and superelastic

material, similar to the embodiments shown in Figs. 3A-C. In each embodiment, the critical high strain areas can comprise plastically deformable or superelastic sections. If all the high strain areas are superelastic, the device will be fully self-expanding. If all the high strain areas are plastically deformable, the device will be balloon expandable only. According to the present invention, some high strain areas comprise superelastic sections and some comprise plastically deformable areas such that the device is self-expanding with the ability to be finely tuned by balloon expansion.

In each of the embodiments shown herein, but referring now to Figs. 4D - 4F, the device has a first constrained diameter D_1 for introduction into a body lumen, a second fully-self-expanded diameter D_2 after initial deployment in a body lumen, and a third fully-forcibly-expanded diameter D_3 after full forced expansion, such as with a balloon. D_3 is greater than D_2 , which is greater than D_1 .

To deploy an endoluminal device of this invention in a body lumen, the method comprises first introducing the device into the body lumen with the device radially constrained in a first configuration, as shown in Figs. 3A, 4A, 4D, and 5A. As shown in Fig. 4D, the device in this configuration has a first diameter D_1 . This radially constrained configuration typically arises after a constraining force F , is applied to the stent to collapse the device. The device in its constrained configuration is then typically loaded within an introducer for introduction into the body of a recipient.

After the introducer reaches the desired deployment position, the device is released from the sheath or other constraining means within the introducer, allowing the device to self-expand into a second configuration approaching or equal to the fully-self-expanded configuration shown in Figs 3B, 4B, and 5B. As shown in Fig. 4E, this fully-self-expanded configuration has a second diameter D_2 greater than the first diameter D_1 .

Then, optionally, a balloon is inserted within the circumference of the device and inflated to forcibly expand at least longitudinal portions of the device to a third configuration. As further described below, this third configuration may range between greater than the second configuration and less than or equal to the fully-forcibly-expanded configuration shown in Figs. 3C, 4C, and 5C.

As shown in Fig. 4F, the fully-forcibly-expanded configuration has a third diameter D_3 greater than the second diameter D_2 . During the forcible expansion step, the

balloon may forcibly expand the device into a fourth, overexpanded configuration having a diameter greater than the third diameter, as the self-expanding section of the stent may become expanded past its resting state. After the balloon is deflated, however, the device will relax back to the third configuration.

5 It should be noted that in actual deployment of a device in the body, that the deployment method may be terminated after the device expands to the second configuration if the diameter in that configuration is deemed adequate to perform the desired function. In other instances, it may be necessary to fully expand the device into the third configuration. In most instances, however, the desired configuration may be intermediate the second and
10 third configurations. Likewise, it should also be noted that the body lumen may partially constrain all or part of the device from fully expanding even to the fully-self-expanded configuration. Thus, the second configuration may comprise an expanded configuration wherein the device or portions of the device have a diameter somewhat less than D_2 . Thus, the device in its finally deployed configuration may have a single diameter throughout, where that diameter ranges from somewhat less than D_2 to less than or equal to D_3 , or some longitudinal sections may have a diameter as small as somewhat less than D_2 , other sections a diameter as great as D_3 , and still other sections a diameter intermediate D_2 and D_3 .

The advantage of the present invention is that it can in fact be tailored to conform to the anatomy of the lumen in which it is deployed by deforming the plastically deformable section of the device without changing the characteristics of the superelastic section of the device. Thus, the invention comprises a self-expanding device that can be "fine tuned" by deforming the plastically deformable section to achieve optimum sizing. This may be particularly useful for adapting a device to a lumen having a non-round, more oval cross-section, an application for which self-expanding devices generally are considered
25 deficient because of their tendency to deploy with a round cross-section. Additionally, to the extent that the plastically deformable materials can be selected having better x-ray visibility than superelastic materials, devices of the present invention may also have increased x-ray visibility without the need for adding special radiopaque markers.

30 Devices of this invention may be manufactured by any of the typical means known in the art, consistent with this invention. For example, filamentary devices may be wound upon a mandrel or formed into a sheet, then rolled into a cylindrical shape.

Similarly, cut tube devices may be cut in sheet form and then rolled, or formed as a tube and cut in their tubular configuration.

Although described above with respect to devices wherein the superelastic section and the plastically deformable section extend longitudinally along the length of the device, each section may instead comprise tubular portions axially attached to one another, as shown in Fig. 9. Fig. 9 depicts device 700 deployed within a lumen 702 having a small diameter section 704, a tapered section 706, and a large diameter section 708. A first superelastic section 14a having a first self-expanded diameter d_1 is deployed in section 704 and a second superelastic section 14b having a second self-expanded diameter d_2 is deployed in section 708. It should be understood that the deployed self-expanded diameters d_1 and d_2 as constrained by lumen 702 may be slightly less than the fully self-expanded diameters (not shown) of section 14a and 14b. It should also be understood that portions 704 and 708 of lumen 702 may also be tapered somewhat, and that the self-expanded diameters may be variable from a more-lumen-constrained diameter at one end to a less-lumen-constrained diameter at the opposite end. Plastically deformable section 16a is deployed within tapered section 706. The presence of plastically deformable section 16a allows the taper of the device to be tailored specifically to the tapered diameter of tapered section 706 of lumen 702 such that the diameter of section 16a is essentially d_1 at first end 720 and essentially d_2 at second end 722. As used herein "essentially" means that the diameter at each end may be slightly greater or less than the respective diameter of the adjacent section. Of course, although shown in Fig. 9 with a plastically deformable section between two superelastic sections, the device may comprise two plastically deformable sections having a superelastic section therebetween, or any multiple of plastically deformable and superelastic sections, including merely one of each section.

Plastically deformable section 16 in device 700 may comprise all plastically deformable materials, or may be a combination of plastically deformable materials and superelastic materials as described above. For example, device 700 may comprise a zig-zag architecture as shown in Figs. 3A-3C and 6, comprising one or more filaments 15 wherein section 16a comprises plastically deformable material 320 that constrains at least portions of the filaments. Similarly, device 700 may comprise a cut tubular device in which section 16a comprises a composite portion of plastically deformable material and superelastic whereas sections 14a and 14b comprise superelastic material only, such as shown in Fig. 7E. Depending on the difference in diameter between sections 704 and 708 of lumen 702,

superelastic sections 14a and 14b may have the same fully-self-expanded diameter, or section 14b may have a larger fully-self-expanded diameter than section 14a. Thus, sections 14a, 14b, and 16 may comprise discrete sections attached together by any means known in the art, such as by suturing, welding, brazing, adhesively bonding, or attachment to a common graft. Sections 14a, 14b, and 16 may also be attached to one another by any of the means described in the aforementioned U.S. Patent Application Serial No. 09/442,165. In the alternative, device 700 may comprise a unitary superelastic construction in which sections 14a and 14b are identical in construction and fully-self-expanded diameter, and section 16 merely comprises constraining plastically deformable material combined with the superelastic material as described herein.

Finally, device 700 may comprise a device in which each of sections 14a, 14b, and 16a themselves comprise combinations of superelastic and plastically deformable subsections wherein each superelastic subsection and plastically deformable subsection extend longitudinally along the length of each section as shown, for example, in Fig. 1. Thus, section 16a may merely be relatively more plastically deformable than sections 14a and 14b. For example, as shown in Fig. 9, section 16a comprises more plastically deformable subsections than in sections 14a and 14b. Stated another way, section 16a has a higher ratio of plastically deformable material to superelastic material than in sections 14a and 14b.

Whereas device 700 as shown in Fig. 9 has a plastically deformable section in the middle, in some instances it may be preferable to have plastically deformable sections only on the ends. For example, as shown in Fig. 10, device 1000 has plastically deformable sections 1002 and 1003 on opposite ends and a superelastic section 1004 in the center. For simplicity, device 1000 is depicted as a solid cylinder in side view with each section clearly defined, but is understood to have any filamentary or cut tubular architecture known in the art, with each section not necessarily definable from external viewing. This configuration is particularly useful to address an existing problem with self-expanding stents that "jump off" the delivery catheters during deployment. The configuration of device 1000 assures that the ends stay in place on the balloon catheter until expanded to implant the device precisely where desired. As shown in Fig. 10, the device ends have longitudinal stripes 1006 of plastically deformable material, such as what would result on end 768 of tube structure 764 shown in Fig. 7E, for example, after a cutting or etching step to create the device architecture, as depicted in Fig. 7F. This allows the ends of the device to be tapered or flared as necessary to conform to the anatomy of the patient.

Although illustrated and described above with reference to certain specific embodiments, the present invention is nevertheless not intended to be limited to the details shown. Rather, various modifications may be made in the details within the scope and range of equivalents of the claims and without departing from the spirit of the invention.

100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000

What is claimed:

1 1. An endoluminal device comprising at least one superelastic section and
2 at least one plastically deformable section.

1 2. The device of claim 1, wherein the plastically deformable section has a
2 greater x-ray visibility than the superelastic section.

1 3. The device of claim 1 having a length wherein each of the superelastic
2 section and the plastically deformable section extend longitudinally along the length of the
3 device.

1 4. The device of claim 1 further comprising a plurality of filaments
2 including one or more superelastic filaments and one or more plastically deformable
3 filaments.

1 5. The device of claim 4 having a length, wherein said one or more
2 superelastic filaments extend longitudinally substantially parallel to said one or more
3 plastically deformable filaments along the length of the stent.

1 6. The device of claim 5 having a first end and a second end, wherein
2 each of said superelastic filaments and said plastically deformable filaments extends only
3 once from the first end to the second end of the stent.

1 7. The device of claim 4 having a first end and a second end, wherein at
2 least one of said superelastic filaments or deformable filaments longitudinally traverses the
3 length of the stent from the first end to the second end in a plurality of columnar units.

1 8. The device of claim 4 consisting of a single superelastic filament and a
2 single plastically deformable filament.

1 9. The device of claim 4, wherein each of said superelastic filaments is
2 connected along one or more longitudinal portions thereof to another superelastic filament,
3 another columnar unit of the same superelastic filament, one or more of said plastically
4 deformable filaments, or a combination thereof, and each of said plastically deformable
5 filaments is connected along one or more longitudinal portions thereof to another plastically

6 deformable filament, another columnar unit of the same plastically deformable filament, one
7 or more of said superelastic filaments, or a combination thereof.

1 10. The device of claim 9, wherein the longitudinal portions are connected
2 at a joint by one of: a brazed connection, a weld, an adhesive bond, or a suture.

1 11. The device of claim 9 further comprising one or more joints
2 comprising: a first longitudinal portion of one of the superelastic filaments, a second
3 longitudinal portion of one of the plastically deformable filaments abutting said first portion,
4 and a joining coil wrapped about said first and second portions.

1 12. The device of claim 11, wherein said superelastic filaments comprise a
2 superelastic grade of nitinol; said plastically deformable filaments comprise a material
3 selected from the group consisting of: gold, platinum, tantalum, titanium, stainless steel,
4 tungsten, a nickel alloy, a cobalt alloy, a titanium alloy, and a combination thereof; and said
5 brazed coil comprises a thermal shape memory grade of nitinol.

1 13. The device of claim 1, wherein each said superelastic section comprises
2 a precision-cut sheet or a longitudinally severed precision-cut tube.

1 14. The device of claim 13, wherein each said plastically deformable
2 section comprises at least one columnar unit having a zig-zag configuration disposed between
3 two superelastic sections or between opposite longitudinal edges of a single superelastic
4 section.

1 15. The device of claim 14 consisting of a single plastically deformable
2 section comprises a single columnar unit attached between opposite longitudinal edges of a
3 single superelastic section.

1 16. The device of claim 1, wherein each plastically deformable section
2 comprises a combination of superelastic material and plastically deformable material wherein
3 said plastically deformable material constrains the superelastic material.

1 17. The device of claim 16, wherein said combination is selected from a
2 group consisting of: plastically deformable material plated onto said superelastic material, a
3 plastically deformable hypotube overlaid onto said superelastic material, ion implantation of

4 said plastically deformable material into said superelastic material, and a composite
5 comprising said deformable material and said superelastic material.

1 18. The device of claim 16, wherein the combination comprises a
2 composite comprising plastically deformable material sandwiched between inner and outer
3 layers of superelastic material.

1 19. The device of claim 16, wherein the plastically deformable material is
2 gold.

1 20. The device of claim 16 further comprising one or more hoops in a zig-
2 zag configuration of oppositely-pointing apex sections, each plastically deformable section
3 comprising one or more apex sections comprising said plastically deformable material.

1 21. The device of claim 19 further comprising a plurality of hoops wherein
2 the apex sections pointed in a first direction on each of said hoops are longitudinally aligned
3 and the plastically deformable apex sections on each of said hoops are longitudinally aligned.

1 22. The device of claim 1 having a first constrained diameter, a second
2 fully-self-expanded diameter, and a third fully-forcibly-expanded diameter, wherein said
3 third diameter is greater than said second diameter and said second diameter is greater than
4 said first diameter.

1 23. The device of claim 1, wherein each of said superelastic sections
2 comprises nitinol and each of said plastically deformable sections comprises a plastically
3 deformable material selected from the group consisting of: gold, platinum, tantalum,
4 titanium, stainless steel, tungsten, palladium, a nickel alloy, a titanium alloy, a cobalt alloy,
5 and a combination thereof.

1 24. The device of claim 1, wherein the device is selected from the group
2 consisting of: a stent and a vena cava filter.

1 25. The device of claim 1, wherein said at least one superelastic section
2 comprises a first tubular section and said at least one plastically deformable section comprises
3 a second tubular section.

1 26. The device of claim 25, wherein the first tubular section consists
2 essentially of a superelastic material alone and the second tubular section consists essentially
3 of plastically deformable material alone.

1 27. The device of claim 25, wherein the second tubular section comprises a
2 combination of superelastic material and plastically deformable material having a first ratio of
3 plastically deformable material to superelastic material.

1 28. The device of claim 27, wherein the device comprises two opposite end
2 sections having a middle section therebetween, the middle section comprising the first tubular
3 section, and the two opposite ends each comprising second tubular sections.

1 29. The device of claim 28, wherein each end section comprises the
2 plastically deformable material aligned in longitudinal stripes between stripes of superelastic
3 material.

1 30. The device of claim 27, wherein the first tubular section comprises a
2 combination of superelastic material and plastically deformable material having a second ratio
3 of plastically deformable material to superelastic material less than said first ratio.

1 31. The device of claim 25 further comprising a third tubular section
2 comprising a superelastic section, the second tubular section disposed longitudinally between
3 the first tubular section and the third tubular section, the first tubular section having a first
4 fully-self-expanded diameter and the second tubular section having a second fully-self-
5 expanded diameter.

1 32. The device of claim 31, wherein the first fully-self-expanded diameter
2 is less than the second fully-self-expanded diameter, and the second tubular section has a
3 fully-forcibly-expanded diameter at least as great as said second fully-self-expanded diameter.

1 33. A method of manufacturing an endoluminal device having an
2 architecture, said method comprising:

3 (a) forming a composite comprising a first layer comprising a first
4 material, a second layer comprising the first material, and an intermediate layer between the
5 first and second layers comprising a second material in a non-continuous distribution; and

6 (b) cutting or etching away portions of the composite tube in a pattern to
7 form the device architecture.

1 34. The method of claim 33, wherein step (a) comprises forming the
2 composite as a sheet and rolling the sheet to a desired thickness.

1 35. The method of claim 34 further comprising forming the sheet into a
2 tube prior to step (b).

1 36. The method of claim 34 further comprising forming the device
2 architecture into a tubular shape after step (b).

1 37. The method of claim 33, wherein step (a) comprises forming the
2 composite as tube wherein the first layer is an inner annular layer and the second layer is an
3 outer annular layer and the intermediate layer is an annular layer between the inner and outer
4 layers.

1 38. The method of claim 33 wherein the non-continuous distribution
2 comprises a continuous longitudinal stripe, a non-continuous longitudinal stripe, a continuous
3 transverse stripe, or a non-continuous transverse rings.

1 39. A method of deploying an endoluminal device in a body lumen, the
2 device comprising at least one superelastic section and at least one plastically deformable
3 section, the method comprising:

4 (a) introducing the device into the body lumen with the device radially
5 constrained in a first configuration having a first diameter;

6 (b) allowing the device to self-expand into a second configuration having a
7 second diameter greater than the first diameter and less than or equal to a fully-self-expanded
8 diameter; and optionally,

9 (c) forcibly expanding the device into a third configuration in which at
10 least one longitudinal portion of said device has a third diameter greater than said second
11 diameter and equal to or less than a fully-forcibly-expanded diameter.

1 40. The method of claim 39 wherein step (c) comprises using a balloon to
2 forcibly expand said device into said third configuration.

1 41. The method of claim 40 wherein step (c) further comprises using said
2 balloon to forcibly expand at least portions of said device into a fourth, intermediate
3 configuration having a fourth, overexpanded diameter greater than said fully-forcibly-
4 expanded diameter, and then allowing said device to relax to said third configuration.

1 42. The method of claim 39 wherein the device comprises a first, tubular
2 section comprising one of the superelastic sections and a second tubular section comprising
3 one of the plastically-deformable sections, the first tubular section having a first fully-self-
4 expanded diameter and the second tubular section having a fully-forcibly expanded diameter
5 greater than the first fully-self-expanded diameter, the method further comprising:

6 in step (a) introducing the device into the body lumen with the device radially
7 constrained in the first configuration in which each tubular section has the first diameter;

8 in step (b) allowing the device to self-expand into the second configuration in
9 which the first tubular section has the second diameter; and

10 in step (c) forcibly expanding the device into the third configuration in which
11 the second tubular section has a diameter greater than the second diameter of the first tubular
12 section.

1 43. The method of claim 42, wherein the device is deployed in a lumen
2 comprising a tapered portion, the method further comprising:

3 in step (b) allowing the device to expand in a location wherein the second
4 tubular section is aligned with the tapered portion of the lumen; and

5 in step (c) forcibly expanding said second tubular section to conform to said
6 tapered portion of the lumen such that the second tubular section comprises a variable
7 diameter expanding from essentially the second diameter of the first tubular section at a first
8 end to larger diameter at a second end.

1 44. The method of claim 42, wherein the device has a middle section and
2 two opposite end sections, the first tubular section comprises the middle section, the end

sections each comprise second tubular sections, the device is introduced into the body on a balloon catheter, and in step (b) the second configuration comprises a configuration wherein the second tubular sections remain in contact with the balloon catheter.

45. The method of claim 42, wherein the device has a middle section and two opposite end sections, the first tubular section comprises the middle section, the end sections each comprise second tubular sections, and the third configuration into which the second tubular section is forcibly expanded in step (c) comprises a configuration wherein one or both end sections are tapered.

46. The method of claim 39 wherein the device comprises a first, tubular section comprising one of the superelastic sections, a second tubular section comprising one of the plastically-deformable sections, and a third tubular section comprising one of said superelastic sections, the second tubular section disposed longitudinally between the first tubular section and the third tubular section, the first tubular section having a first fully-self-expanded diameter, the third tubular section having a second fully-self-expanded diameter greater than or equal to the first fully-self-expanded diameter, and the second tubular section having a fully-forcibly expanded diameter at least as great as the second fully-self-expanded diameter, the method further comprising:

in step (a) introducing the device into the body lumen with the device radially constrained in the first configuration in which each tubular section has a first diameter;

in step (b) allowing the device to self-expand into the second configuration in which the first and third tubular sections each have respective second diameters greater than the respective first diameters and less than or equal to the respective fully-self-expanded diameters; and

in step (c) forcibly expanding the device into the third configuration in which the second tubular section has a diameter greater than said second diameter of the first tubular section.

47. The method of claim 46 wherein said third tubular section has a greater fully-self-expanded diameter than said first tubular section, and wherein the device is deployed in a lumen comprising a smaller diameter portion, a larger diameter portion greater

4 than said smaller diameter portion, and a tapered portion between said smaller diameter
5 portion and said larger diameter portion, the method further comprising:

6 in step (b) allowing the device to expand in a location wherein the first tubular
7 section is aligned with the smaller diameter portion of the lumen, the second tubular section
8 is aligned with the tapered portion of the lumen, and the third tubular section is aligned with
9 the larger diameter portion of the lumen; and

10 in step (c) forcibly expanding said second tubular section to conform to said
11 tapered portion of the lumen such that the second tubular section comprises a variable
12 diameter ranging from essentially the second diameter of the first tubular section at a first end
13 to essentially the second diameter of the third tubular section at a second end.

14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2

COMBINATION SELF-EXPANDABLE,
BALLOON-EXPANDABLE ENDOLUMINAL STENT

ABSTRACT

An endoluminal device, such as a stent or a vena cava filter, comprising at least one superelastic section and at least one plastically deformable section. The superelastic section may comprise, for example, a superelastic grade of nitinol, whereas the plastically deformable section may comprise, for example, gold, platinum, tantalum, titanium, stainless steel, tungsten, a nickel alloy, a cobalt alloy, a titanium alloy, or a combination thereof. Each plastically deformable section may merely comprise a constrained portion of the superelastic section comprising a plastically deformable material, such as gold. The device enables deployment by a method comprising introducing the device into a body lumen with the device radially constrained in a first configuration having a first diameter; allowing the device to self-expand into a second configuration having a second diameter less than or equal to a fully-self-expanded diameter; and then optionally "fine-tuning" the device by forcibly expanding the device into a third configuration having a third diameter in a range between the second diameter and less than or equal to a fully-forcibly-expanded diameter. The superelastic and plastically deformable sections may be tubular sections placed end-to-end, such that the plastically deformable section can be conformed to fit a tapered section of a lumen.

FIG 4C

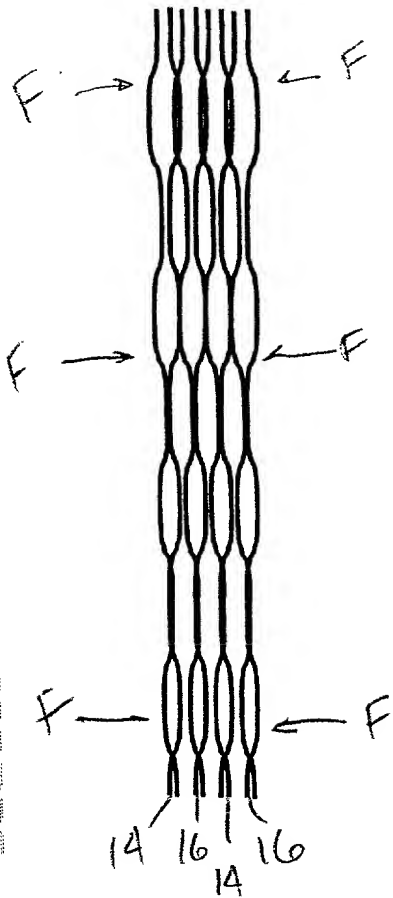


FIG 4B

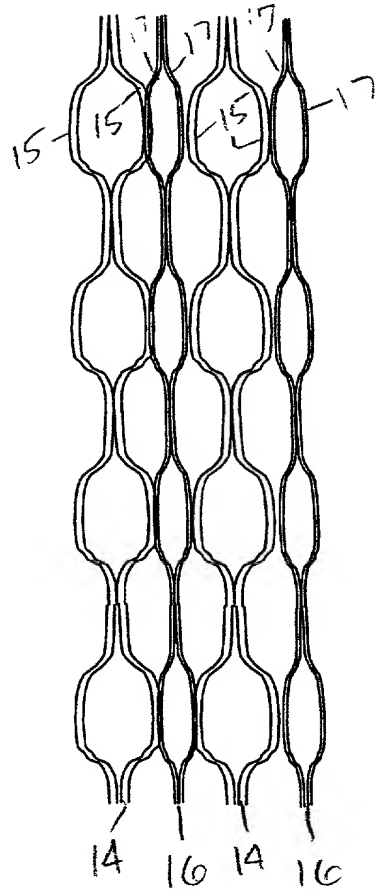


FIG. 4C


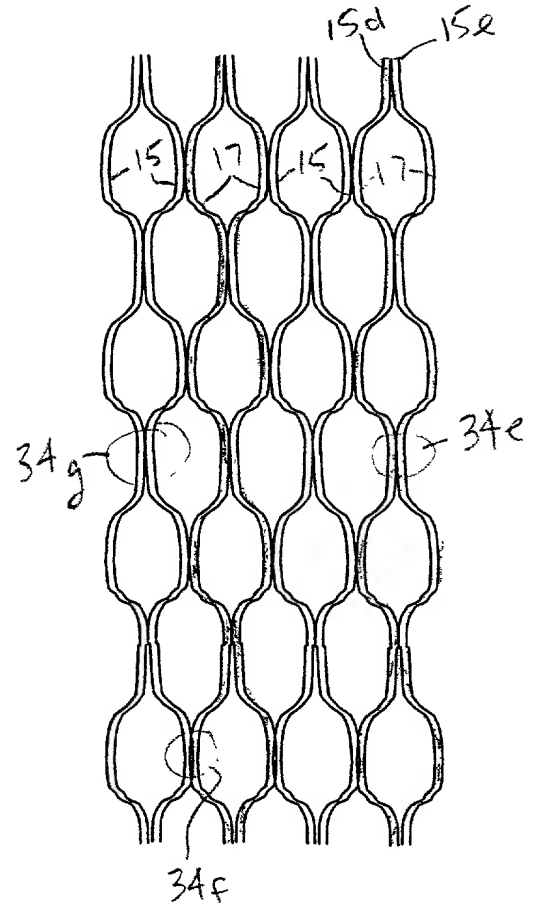


FIG 4D

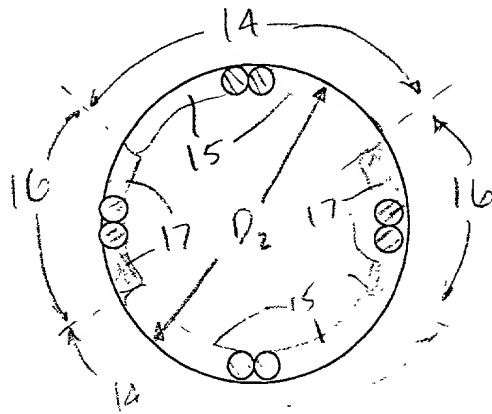


FIG 4E

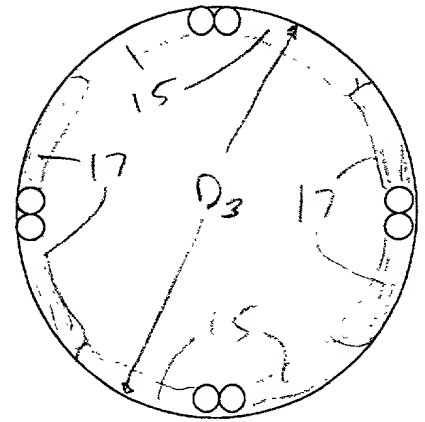


FIG 4F

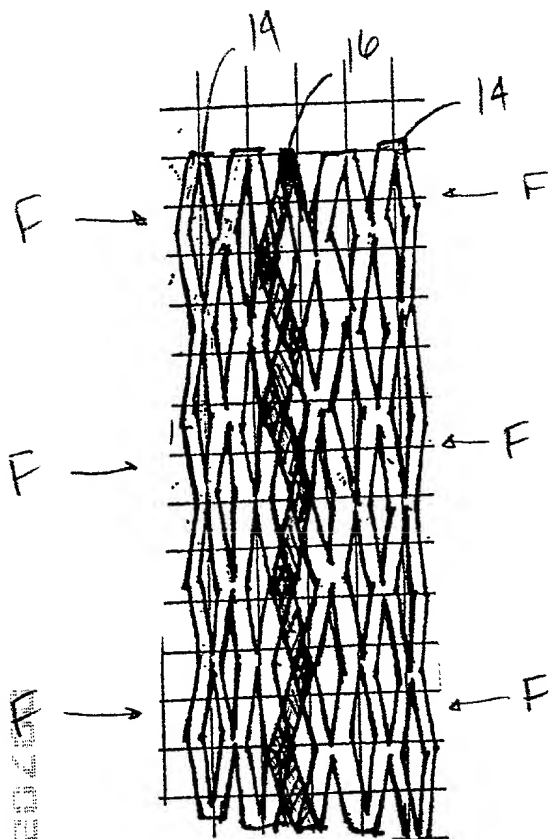


FIG. 5A

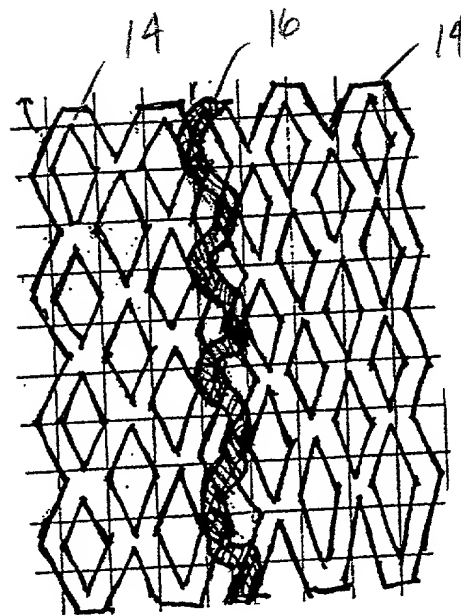


FIG. 5B

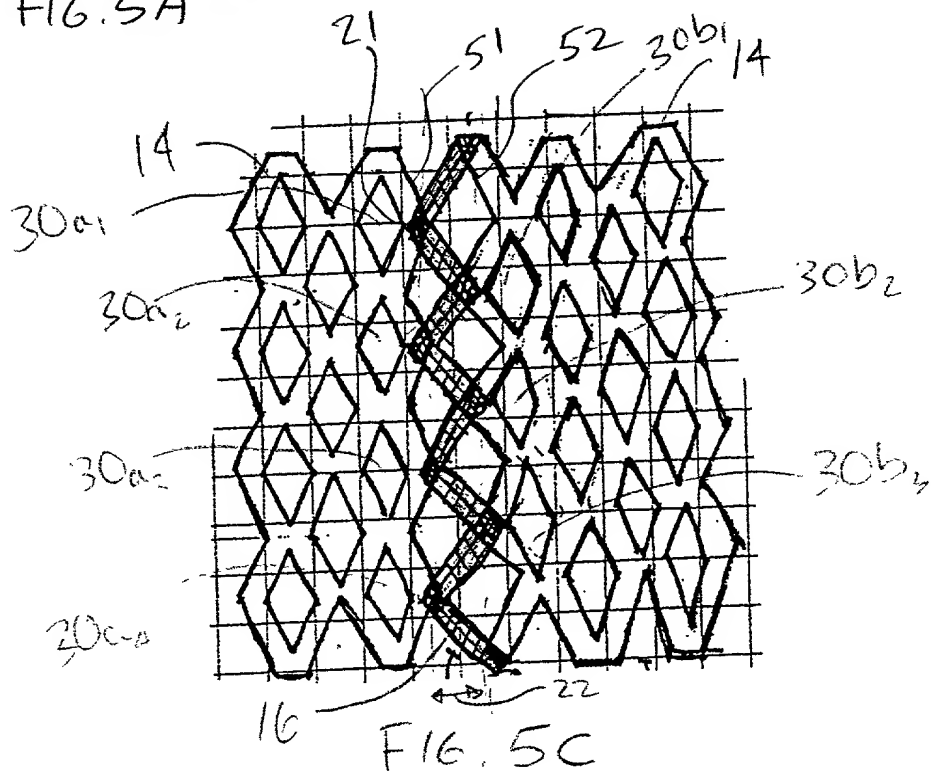


FIG. 5C

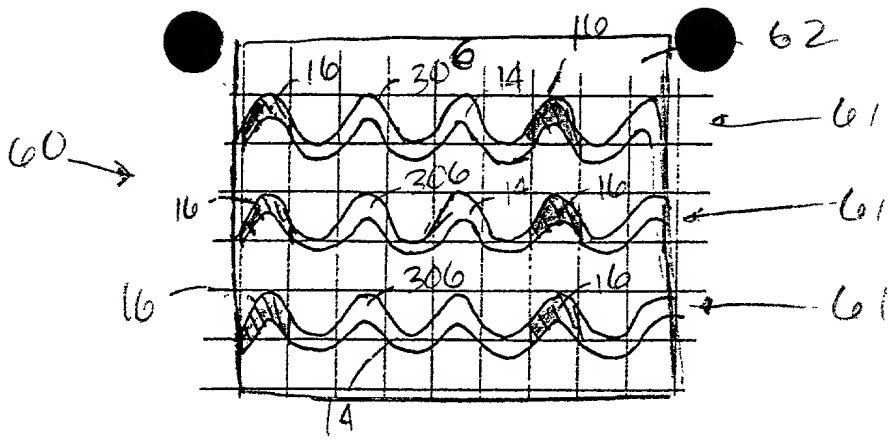


FIG. 6

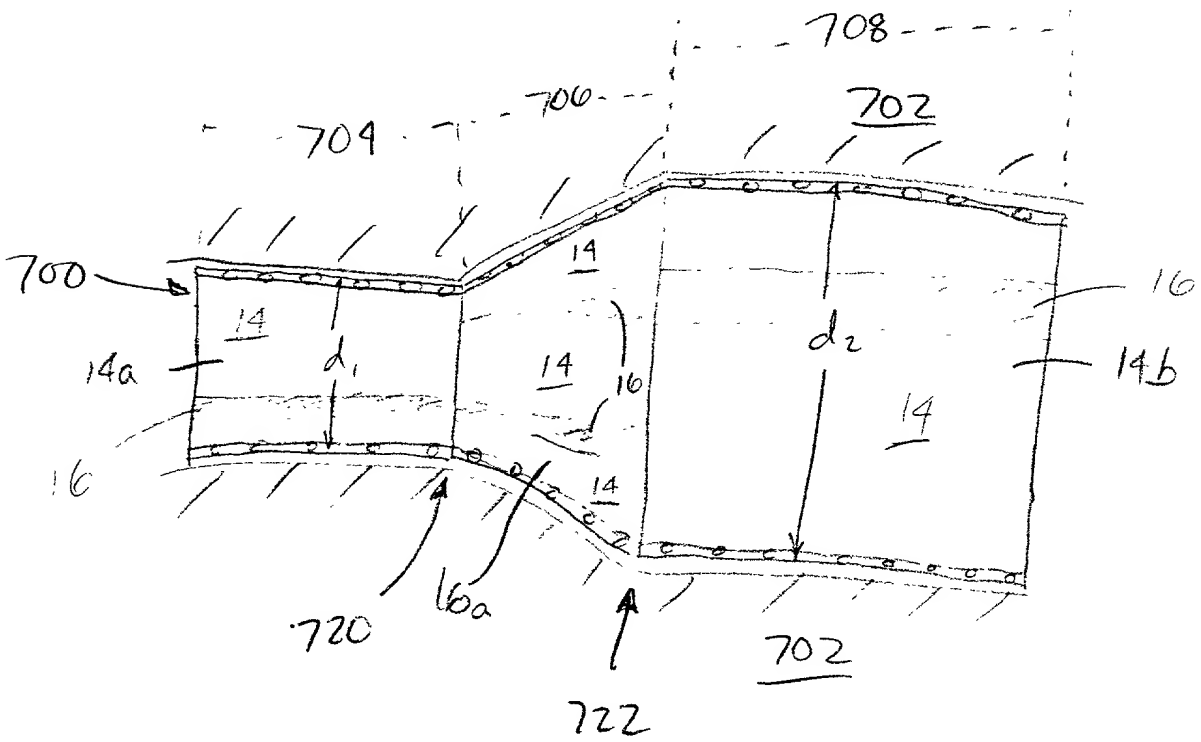


FIG. 9

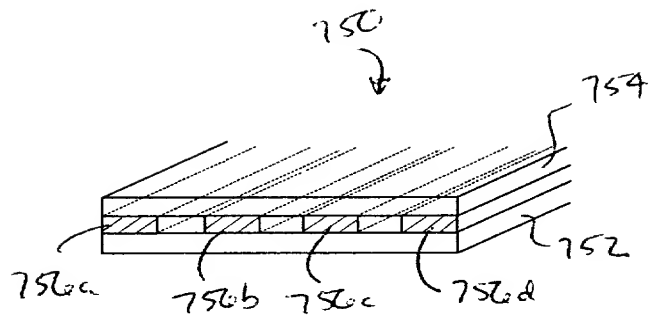


FIG. 7A

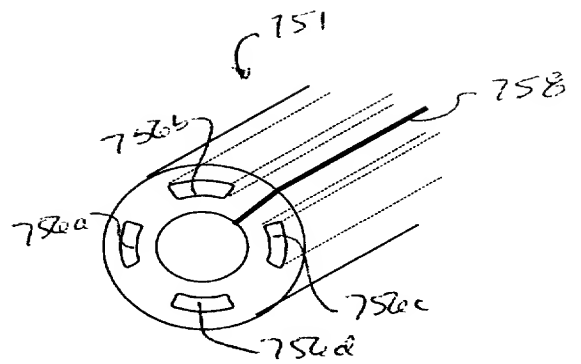


FIG. 7B

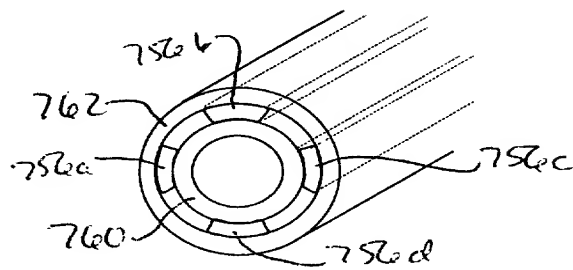


FIG. 7C

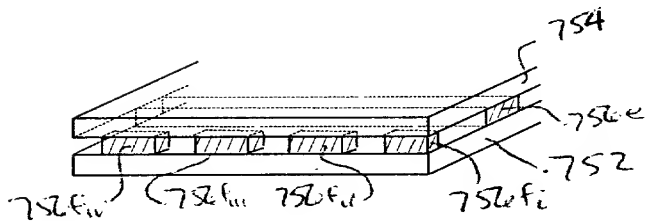


FIG. 7D

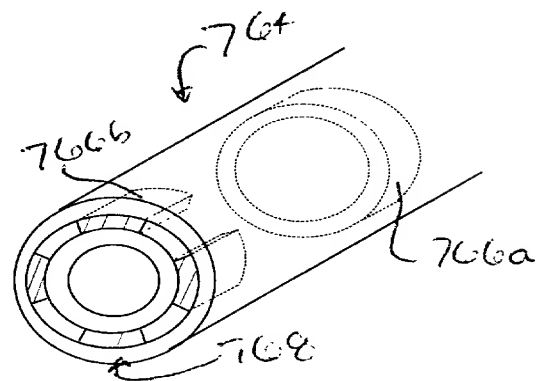
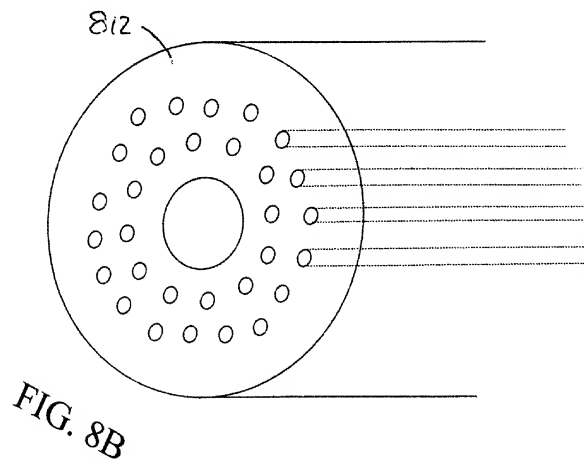
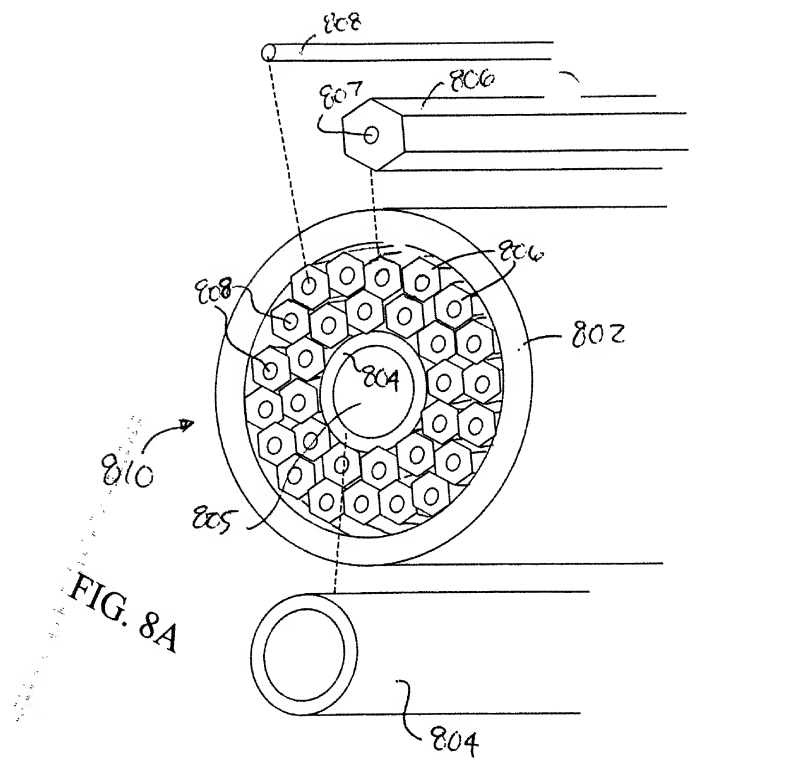


FIG. 7E



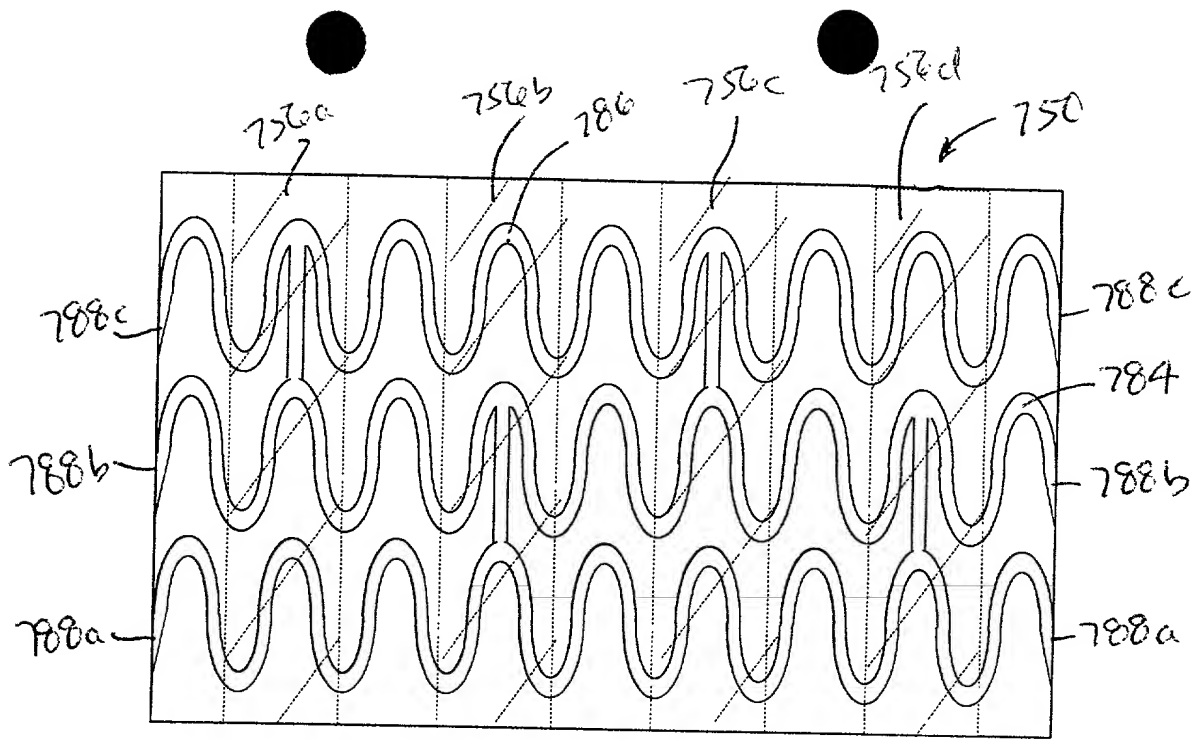


FIG. 7F

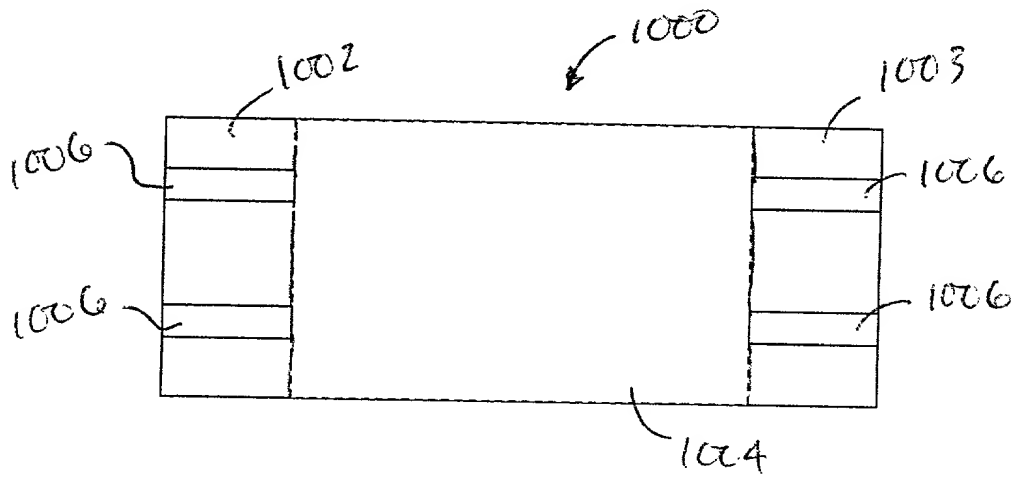


FIG. 10

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

COMBINATION SELF-EXPANDABLE, BALLOON-EXPANDABLE ENDOLUMINAL DEVICE,

the specification of which is attached hereto unless the following box is checked:

☐ was filed on _____ as
United States Application Number or PCT International Application Number _____
and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Not Claimed

_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

_____ (Application Number)	_____ (Filing Date)
_____ (Application Number)	_____ (Filing Date)

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

09/362,261

(Application Number)

July 28, 1999

(Filing Date)

Pending

(Status - patented, pending, abandoned)

(Application Number)_____
(Filing Date)_____
(Status - patented, pending, abandoned)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Paul F. Prestia	Reg. No. 23,031	Lawrence E. Ashery	Reg. No. 34,515	Jack J. Jankovitz	Reg. No. 42,690
Allan Ratner	Reg. No. 19,717	Christopher R. Lewis	Reg. No. 36,201	Jonathan H. Spadt	Reg. No. 45,122
Andrew L. Ney	Reg. No. 20,300	Robert L. Andersen	Reg. No. 25,771	Christopher I. Halliday	Reg. No. 42,621
Kenneth N. Nigon	Reg. No. 31,549	Joshua L. Cohen	Reg. No. 38,040	Scott A. Mckeown	Reg. No. 42,866
Kevin R. Casey	Reg. No. 32,117	Daniel N. Calder	Reg. No. 27,424		
Benjamin E. Leace	Reg. No. 33,412	Louis W. Beardell, Jr.	Reg. No. 40,506		
James C. Simmons	Reg. No. 24,842	Jacques L. Etkowicz	Reg. No. 41,738		

Address all correspondence to: Paul F. PrestiaRatner & Prestia, Suite 301, One Westlakes, Berwyn, P.O. Box 980, Valley Forge, PA 19482-0980Address all telephone calls to: Paul F. Prestia at (610) 407-0700.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor (given name, family name) Steven E. WalakInventor's signature Steven E. Walak Date 10/26/00Residence Natick, MassachusettsCitizenship United States of AmericaPost Office Address 5 Digren RoadNatick, Massachusetts 01760

Full name of second joint inventor, if any (given name, family name) _____

Second Inventor's signature _____ Date _____

Residence _____

Citizenship _____

Post Office Address _____

☐ Additional inventors are being named on separately numbered sheets attached hereto.